

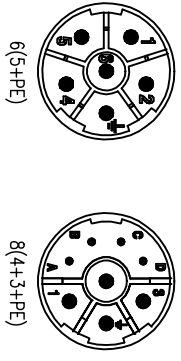
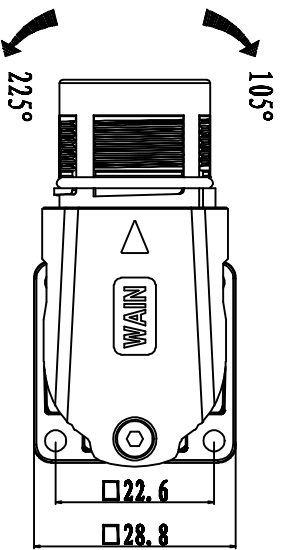



日期/Date	1	2	3	4	5	6
制图/Drawn	1					
审核/Checked						
工艺/Process						
材料表/Contacts	产料料号/Cable outlet	型号/Part Code	重量/Weight			
6(5+PE)	1660063101003	M23-MC06-BK/P28-8-SE成品	110 g			
8(4+3+PE)	1660083101003	M23-MC04/4-BK/P28-8-SE成品	110 g			

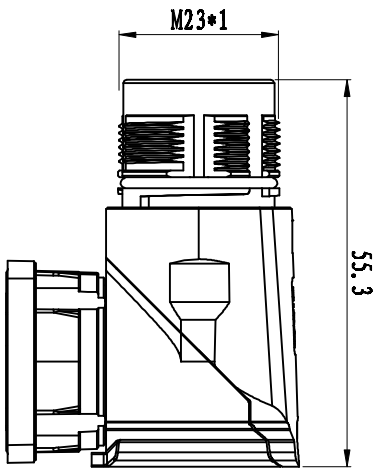

特殊布置图
Contact arrangement

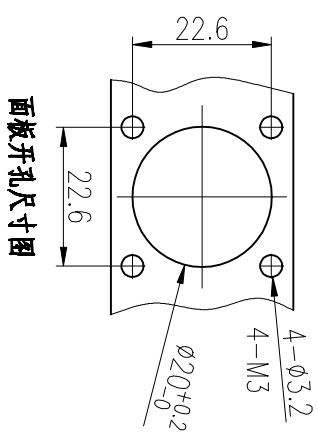

面板开孔尺寸图

技术参数:

产品系列:	M23			
材料:	6(5+PE)		8(4+3+PE)	3+PE
插针分号:	5+PE			
插针直径(mm):	$\varnothing 2$		$\varnothing 1$	$\varnothing 2$
接触面积(mm ² /AWG):	0.1-4.0/28-12	0.03-1.0/32-18	0.1-4.0/28-12	
额定电压(25°C):	30A	9A	30A	
额定电压:	630V	250V	630V	
额定冲击电压:	6kV	4kV	6kV	
绝缘等级:	III			
使用寿命:	3			
材料管理代码:				

- 材料列表:
- 外壳材料: 锌合金
 - 外表表面处理: 镀锌
 - 插针材料: 磷铜
 - 密封材料: 氟橡胶
 - 温度范围: -20°C...+130°C
 - 额定电流: > 500
 - 防护等级: IP67

- Technical specification:
- Series: M23
 - Number of contacts: 6(5+PE)
 - Contact arrangement: 5+PE
 - Contact diameter(mm): $\varnothing 2$
 - Wire gauge(mm²/AWG): 0.1-4.0/28-12
 - Terminal crimp: 0.03-1.0/32-18
 - Rated current(25°C): 0.1-4.0/28-12
 - Rated voltage: 30A
 - Rated impulse voltage: 630V
 - Overvoltage category: 6kV
 - Pollution degree: III
- Mechanical specification:
- Material of housing: Zinc(GD-Zn)
 - Finish of housing: Nickel-plated
 - Material of Insert: Polyamide
 - Material of sealing: FPM
 - Temperature range: -20°C...+130°C
 - Mating cycles: > 500
 - Degree of protection: IP67
 - Contact need to be ordered separately.

图号/Drawing No.	M23-MCxx-BK/P28-8-SE		成品
产料料号/Part Code	M23-MCxx-BK/P28-8-SE		
产料名称/Part Name			
比例/Scale	1:1	重量/Weight	数量/Qty.
版本/REV	V1.1		
表面处理/Finish			
材料/Material			
更改描述/Description	姓名/Name	日期/Date	签名/Signature
制图/Drawn	ZQ XU	30.12.2019	
审核/Checked	HQ ZHANG	30.12.2019	
工艺/Process			



All Dimensions in mm
Original Size DIN A 4