



- 技术参数:
- 材料: 压铸锌
 - 表面处理: 镀镍
 - 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - 防护等级: IP65 (联锁状态, IEC 60529)
 - 联锁元件:
 - 锁扣方式: 单扣
 - 材料: 不锈钢
 - 出线方向: 底部出线
 - 密封元件: NBR

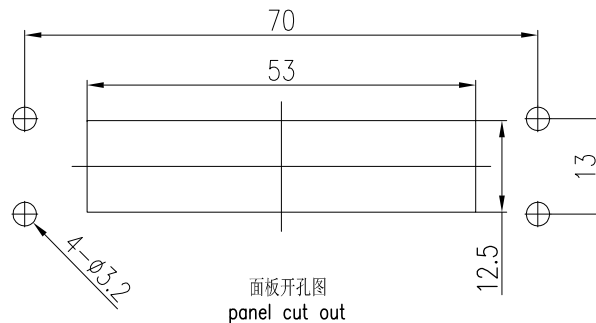

- Technical specification:
- Material: zinc die-cast
 - Surface: Nickel plated
 - Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
 - Degree of protection: IP65 (acc.to IEC 60529 for coupled connector)
 - Locking element:
 - Locking type: single locking latch
 - material: stainless steel
 - Cable entry: bottom entry
 - Hoods/Housings sealing: NBR

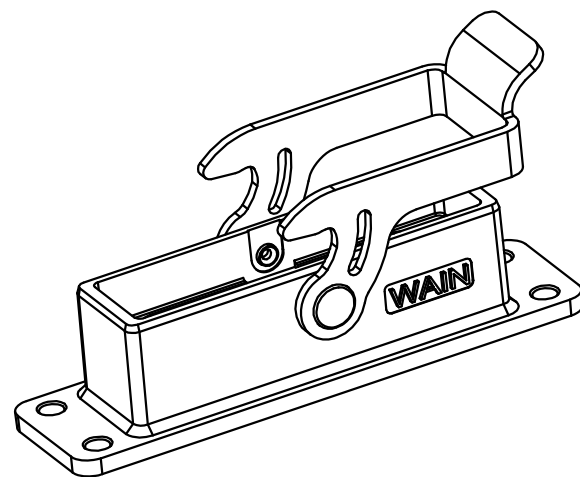

						表面处理 Finish	-			图号 Drawing No.	-
						材料 Material	-			产品代号 Part Code	EMC.DS-044-BK-1L
标记 Mark	处数 Number	变更描述/Description		签名 Signature	日期 Date					产品料号 Part No.	1123003201001
	姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.	产品名称 Part Name	-
绘图 Drawn	HZ LAN	2019.1.29	标准化 Stand.	-	-	1:1	V1.1	53.5g	-		
审核 Checked	HQ ZHANG	2019.1.29									
工艺 Process	-	-	批准 Approved	HQ ZHANG	2019.1.29	All Dimensions in mm Original Size DIN A 4			厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD		