


开孔尺寸图
(Panel cut out)

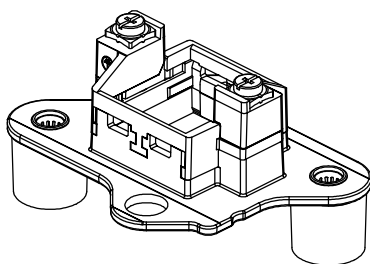


技术参数

- 模块数量: 2+PE
- 材料: 压铸锌
- 温度范围: -40℃ - +125℃
- 浮动公差: ±2mm
- 可插拔次数: ≥500
- 备注: 如果全部装配气动模块时, 对插时需注意正确的模块位置

Technical specification:

- No. of module: 2+PE
- Material: zinc die-cast
- Temperature range: -40℃ - +125℃
- Floating Tolerance: ±2mm
- Mating cycles: ≥500
- Note: If the modules be assembled are all pneumatic modules, pay attention to the correct module position when mating.

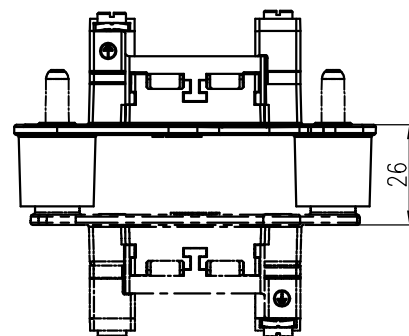

插合距离26mm

						表面处理 Finish		-		图号 Drawing No.		-	
						材料 Material		-		产品代号 Part Code		HF6B-FADK	
标记 Mark		处数 Number		变更描述/Description		签名 Signature		日期 Date		产品料号 Part No.		1310060001005	
姓名/Name		日期/Date		姓名/Name		日期/Date		比例 Scale		版本 REV.		重量 Weight	
SY JI		20.02.2020		-		-		2:3		V1.0		数量 Qty.	
审核 Checked		HZ LAN		20.02.2020						-g		-	
工艺 Process		-		-		批准 Approved		HQ ZHANG		20.02.2020		All Dimensions in mm Original Size DIN A 4	
												厦门唯恩电气有限公司 XIAMEN WAIN ELECTRICAL CO.LTD	